




The V-Steel M-Traction Deep three star (3*) (VMTD) radial tire for haul trucks is ideal for quarry and mining applications. The VMTD tire is designed with an extra deep tread for maximum traction on rocky, gravel and packed earth surfaces, providing excellent wear performance and durability.

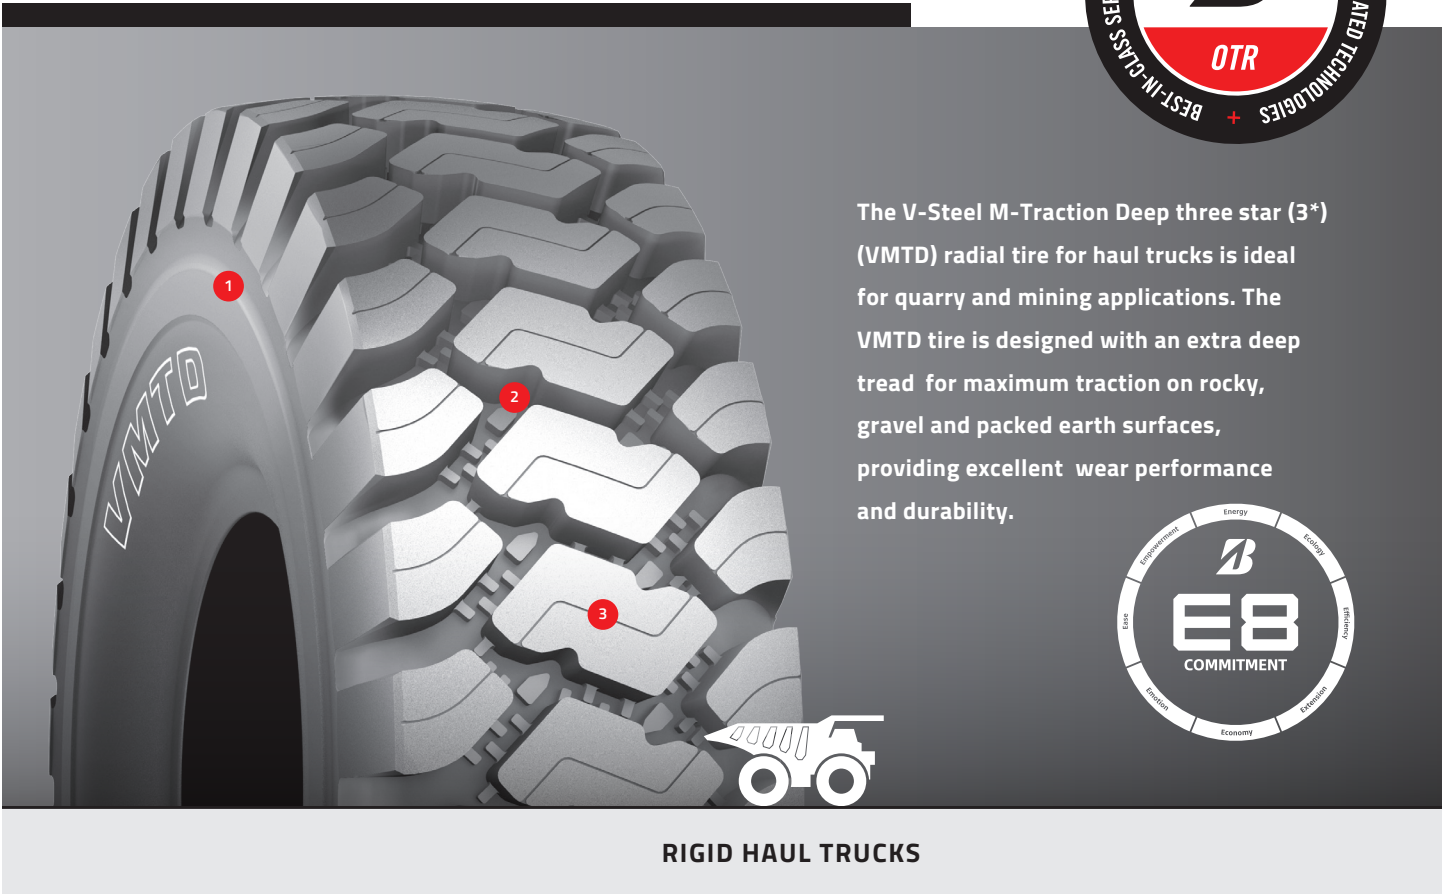


RIGID HAUL TRUCKS

SPECIALIZED FEATURES


1 **BRIDGESTONE'S FIRST LARGE SIZE THREE STAR RATED TIRE WITH NEW CASING STRUCTURE**

Delivers **8%** more load capacity, offering excellent durability†



2 **EXTRA DEEP TREAD, 13% MORE THAN VMTD 2***

Delivers extra-long tread life and provides excellent wear, slip resistance in muddy conditions†



3 **INNOVATIVE DESIGN PATTERN FOR COOLING RUNNING TIRE**

Provides **6%** higher TMPH, helping improve productivity†



BRIDGESTONE COMMERCIAL

See your Bridgestone representative for more information.
BS125 - V24 ©Bridgestone Americas Tire Operations LLC. All Rights Reserved.

† Comparison based on Bridgestone 24.00R35 VMTD 2* VS. Bridgestone 24.00R35 VMTD 3*. Actual results may vary.

† "Best-in-Class Service" is based on the largest number of dealers in the commercial tire dealer network in U.S. found on www.commercial.bridgestone.com.

As compared to the 2022 U.S. Replacement and Retreaded Medium / Heavy Truck Tire Brands with similar market share as listed in the January 2023 Modern Tire Dealer (page 34).

CATEGORY	SIZE	PLY/STAR RATING	COMPOUND/ CONSTRUCTION	TRA	ARTICLE #	AVG. WT. [□] [LBS / KG]	OTD [□] [32nd / MM]	OVERALL DIAMETER [□] [IN / MM]	OVERALL WIDTH [□] [IN / MM]
LARGE TUBELESS	24.00R35	3*	E1A	E-4	007422	1,885 855	97 77	86.3 2,193	26 660
	24.00R35	3*	E2A	E-4	007423	1,885 855	97 77	86.3 2,193	26 660
	24.00R35	3*	E2A LS	E-4	007424	1,885 855	97 77	86.3 2,193	26 660
	24.00R35	3*	E3A	E-4	007425	1,885 855	97 77	86.3 2,193	26 660

TIRE LOAD CAPACITY (LBS/KG)

Based on Cold Inflation Pressure

SIZE	PATTERN	INFLATION PRESSURE	STAR RATING PSI KPA	STAR RATING								
				80 550	83 575	87 600	91 625	94 650	98 675	102 700	109 750	116 800
24.00R35	VMTP 2*	LBS		34,200	35,300	36,400	37,500	38,600	39,700	40,800		
		KG		15,500	16,000	16,500	17,000	17,500	18,000	18,500		
	VMTD 3*	LBS		34,200	35,300	36,400	37,500	38,600	39,700	40,800	43,000	44,100
		KG		15,500	16,000	16,500	17,000	17,500	18,000	18,500	19,500	20,000